




ER Spring Collet Chuck System

Collet Holders With Morse Taper Shank

DIN 6499 DIN 228
MT-SHANK



VERTEX[®]

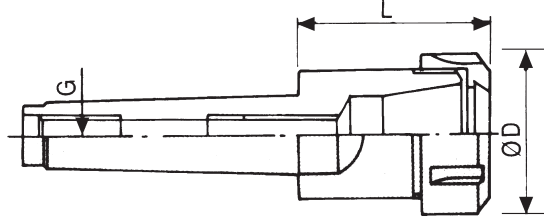

| ORDER NO. | TAPER | COLLET TYPE | L | D | G | WEIGHT KGS | CODE NO. |
|------------------|-------|-------------|----|----|---|------------|----------|
| V-401 | MT2 | ER16 | 40 | 28 | 3/8"-16W or M10X1.5P | 0.2 | 3023-301 |
| V-402 | | ER20 | 43 | 34 | | 0.3 | 3023-302 |
| V-403 | | ER25 | 47 | 42 | | 0.4 | 3023-303 |
| V-404 | MT3 | ER16 | 40 | 28 | 3/8"-16W or 1/2"-12W M10X1.5P, M12X1.75P | 0.3 | 3024-301 |
| V-405 | | ER32 | 70 | 50 | | 0.8 | 3024-302 |
| V-406 | | ER40 | 80 | 63 | USA 1/2"-UNC13 | 1.1 | 3024-303 |
| NEW V-451 | | ER20 | 43 | 34 | 1/2"-12NC or M12X1.75P | 0.3 | 3024-304 |
| V-452 | | ER25 | 47 | 42 | | 0.5 | 3024-305 |
| V-407 | MT4 | ER32 | 60 | 50 | 5/8"-11W or M16X2.0P | 1 | 3025-301 |
| V-408 | | ER40 | 82 | 63 | | 1.4 | 3025-302 |
| V-409 | | ER50 | 85 | 78 | | 2.2 | 3025-303 |
| V-410 | MT5 | ER40 | 82 | 63 | 1"-8W or M24X3.0P | 2.1 | 3026-301 |
| V-411 | | ER50 | 85 | 78 | | 2.9 | 3026-302 |



Collet Chuck Kit With Morse Taper Shank

Including shank, full set of collets, wrench and case.
(ER16, ER20 no Wrench)

1. ER16,20,25 Packed in Wooden Box(W)
2. ER32,40,50, Packed in Plastic Box(P)

Caution:

Please notify the taper size, collete type, set range, and set numbers when ordering.

| ORDER NO. | TAPER | COLLET TYPE | SET RANGE | SET PCS | WEIGHT KGS. | CODE NO. |
|------------------|-------|-------------|-----------|---------|-------------|----------|
| V-412 | MT2 | ER16 | 1-10 | 10 | 1.05 | 3023-401 |
| V-413 | | ER16 | 3-10 | 8 | 1 | 3023-402 |
| V-414 | | ER20 | 2-13 | 12 | 1.3 | 3023-403 |
| V-415 | | ER20 | 4-13 | 10 | 1.2 | 3023-404 |
| V-416 | | ER25 | 2-16 | 15 | 2.4 | 3023-405 |
| V-418 | | ER25 | 4-16 | 7 | 1.3 | 3023-407 |
| V-419 | MT3 | ER16 | 1-10 | 10 | 1.5 | 3024-401 |
| NEW V-420 | | ER16 | 3-10 | 8 | 1.1 | 3024-402 |
| V-441 | | ER20 | 2-13 | 12 | 1.35 | 3023-408 |
| V-442 | | ER20 | 4-13 | 10 | 1.3 | 3023-409 |
| V-443 | | ER25 | 2-16 | 15 | 2.5 | 3023-410 |
| V-444 | | ER25 | 4-16 | 7 | 2.1 | 3023-411 |
| V-421 | | ER32 | 3-20 | 18 | 4.1 | 3024-403 |
| V-422 | | ER32 | 4-20 | 11 | 3 | 3024-404 |
| V-423 | | ER32 | 6-20 | 6 | 2.7 | 3024-405 |
| V-424 | | ER40 | 4-26 | 23 | 7.2 | 3024-406 |
| V-425 | | ER40 | 4-26 | 15 | 6 | 3024-407 |
| V-426 | | ER40 | 6-25 | 7 | 4.5 | 3024-408 |
| V-427 | MT4 | ER32 | 3-20 | 18 | 4.3 | 3025-401 |
| V-428 | | ER32 | 4-20 | 11 | 3.2 | 3025-402 |
| V-429 | | ER32 | 6-20 | 6 | 2.9 | 3025-403 |
| V-430 | | ER40 | 4-26 | 23 | 7.3 | 3025-404 |
| V-431 | | ER40 | 4-26 | 15 | 6.1 | 3025-405 |
| V-432 | | ER40 | 6-25 | 7 | 4.6 | 3025-406 |
| V-433 | MT5 | ER50 | 12-34 | 12 | 9 | 3025-407 |
| V-434 | | ER40 | 4-26 | 23 | 8.2 | 3026-401 |
| V-435 | | ER40 | 4-26 | 15 | 6.9 | 3026-402 |
| V-436 | | ER40 | 6-25 | 7 | 5.4 | 3026-403 |
| V-437 | | ER50 | 12-34 | 12 | 9.5 | 3026-404 |