

Fresa de ângulo duplo, simétrico.
Fresa de doble ángulo, simétrico.
 Double angle milling cutter, symmetrical.

σ $\pm 30'$	d1 js 16 mm	b js 16 mm	d2 H7 mm
45°	50	8	16
45°	63	10	22
45°	80	12	27
45°	100	18	32
60°	50	10	16
60°	63	14	22
60°	80	18	27
60°	100	25	32
90°	50	14	16
90°	63	20	22
90°	80	22	27
90°	100	32	32
120°	63	20	22
120°	80	25	27


HSS (M2)



1322

DIN 847 - 45°, 60°, 90°, 120°

σ $\pm 30'$	d1 js 16 pol	b js 16 pol	d2 H7 pol
45°	2 1/2	1/2	7/8
45°	2 3/4	1/2	1
45°	3	1/2	1
45°	3	5/8	1
60°	2 1/2	1/2	7/8
60°	2 3/4	1/2	1
60°	3	1/2	1
60°	3	5/8	1 1/4
90°	2 1/2	1/2	7/8
90°	2 3/4	1/2	1
90°	3	1/2	1 1/4
90°	3	5/8	1 1/4

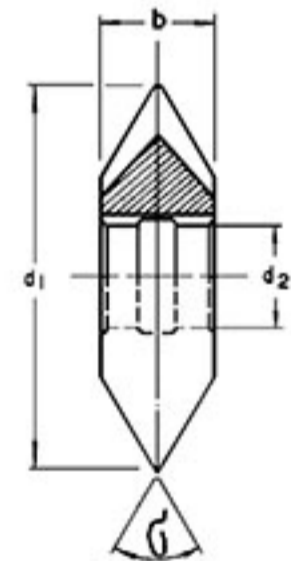

Ex. de especificação: 1322 - 60° - 63 x 14 x 22