

Alargador para máquina com cone morse, corte à direita.

Alesador para máquina con cono morse, corte a la derecha.

Morse taper shank chucking reamer, right-hand cut.



5210

DIN 208 A
dente reto
diente recto
straight tooth




5211

DIN 208 B
dente helicoidal
ângulo de hélice ~ 8° à esq.
diente helicoidal
ángulo de la hélice ~ 8° esq.
helical tooth
helix angle ~ 8° left

HSS (M2)

Semelhante DIN 208			
d1 H 7 pol	l 2 pol	l 1 pol	CM n°
1/4	1	5 1/2	1
5/16	1 5/16	6	1
3/8	1 5/16	6 1/4	1
7/16	1 5/8	7	1
1/2	1 3/4	7 1/16	1
9/16	1 7/8	7 1/2	1
5/8	2 1/16	8 1/4	2
11/16	2 1/16	8 1/2	2
3/4	2 1/4	8 3/4	2
13/16	2 3/8	9	2
7/8	2 1/2	9 1/4	2
15/16	2 3/4	10 1/2	3
1	2 3/4	10 1/2	3

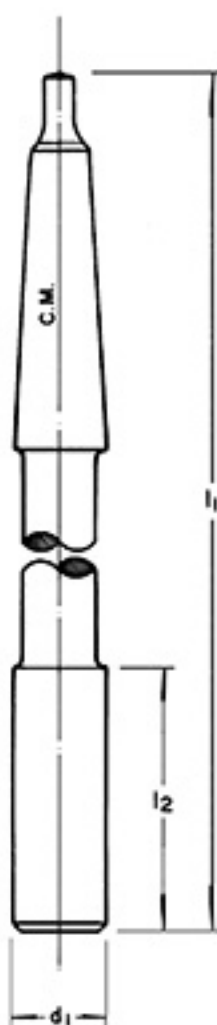

d1 H 7 mm	l 2 / l 1 mm	CM n°
4	19 / 129	1
4.5	19 / 129	1
5	23 / 133	1
5.5	26 / 138	1
6	26 / 138	1
6.5	28 / 144	1
7	31 / 150	1
7.5	31 / 150	1
8	33 / 156	1
8.5	33 / 156	1
9	36 / 162	1
9.5	36 / 162	1
10	38 / 168	1
11	41 / 175	1
12	44 / 182	1
13	44 / 182	1
14	47 / 189	1
15	50 / 204	2
16	52 / 210	2
17	54 / 214	2
18	56 / 219	2
19	58 / 223	2
20	60 / 228	2
21	62 / 232	2
22	64 / 237	2
23	66 / 241	2
24	68 / 268	3
25	68 / 268	3
26	70 / 273	3
27	71 / 277	3
28	71 / 277	3
29	73 / 281	3
30	73 / 281	3
31	75 / 285	3
32	77 / 317	4
33	77 / 317	4
34	78 / 321	4
35	78 / 321	4
36	79 / 325	4
37	79 / 325	4
38	81 / 329	4
40	81 / 329	4
42	82 / 333	4
44	83 / 336	4
45	83 / 336	4
46	84 / 340	4
47	84 / 340	4
48	86 / 344	4
50	86 / 344	4

Ex. de especificação: 5211 - 10 X 38 / 168 X 1